


Liquid Tight Conduit Fittings (Straight), Female

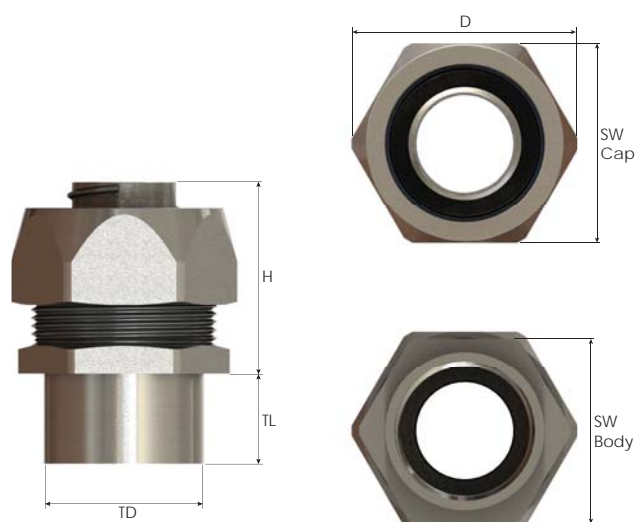

Thread Type METRIC acc. to EN 60423

Size	For Sealtite Nominal Size inch	Max. Internal Ø mm	Thread Length TL mm	Thread Ø TD mm	Spanner Width SW Cap mm	Spanner Width SW Body mm	Outer Ø D mm	max. Height H mm	Part Number	Packing Unit
M16x1,5	5/16"	8,3	11,5	16,0	26,0	24,0	29,0	23,5	BBFM-02(S) F	50
	3/8"	10,2						23,0	BBFM-02 F	
M20x1,5	1/2"	13,5	13,0	20,0	29,0	27,0	32,7	24,5	BBFM-03 F	50
M25x1,5	3/4"	18,5	15,0	25,0	35,0	33,0	38,7	24,5	BBFM-04 F	25
M32x1,5	1"	23,5	15,0	32,0	45,0	43,0	50,0	32,0	BBFM-05 F	10
M40x1,5	1 1/4"	31,8	16,0	40,0	54,0	52,0	60,0	36,5	BBFM-06 F	5
M50x1,5	1 1/2"	36,8	18,0	50,0	63,0	60,0	69,3	38,5	BBFM-07 F	5
M63x1,5	2"	47,8	20,0	63,0	77,0	74,0	85,0	45,0	BBFM-08 F	4

Thread Type PG acc. to DIN 40430

Size	For Sealtite Nominal Size inch	Max. Internal Ø mm	Thread Length TL mm	Thread Ø TD mm	Spanner Width SW Cap mm	Spanner Width SW Body mm	Outer Ø D mm	max. Height H mm	Part Number	Packing Unit
Pg 11	5/16"	8,3	11,5	18,6	26,0	24,0	29,0	23,5	BBFB-03(S) F	50
	3/8"	10,2							BBFB-03 F	
Pg 13,5	3/8"	10,2	11,5	20,4	26,0	24,0	29,0	23,5	BBFB-04 F	50
Pg 16	1/2"	13,5	13,0	22,5	29,0	27,0	32,7	24,0	BBFB-05 F	50
Pg 21	3/4"	18,5	15,0	28,3	35,0	33,0	38,7	24,5	BBFB-06 F	25
Pg 29	1"	23,5	15,0	37,0	45,0	43,0	50,0	32,0	BBFB-07 F	10
Pg 36	1 1/4"	31,8	16,0	47,0	54,0	52,0	60,0	36,5	BBFB-08 F	5
Pg 42	1 1/2"	36,8	18,0	54,0	63,0	60,0	69,3	39,0	BBFB-09 F	5
Pg 48	2"	47,8	20,0	59,3	77,0	74,0	85,0	44,5	BBFB-10 F	4

Thread Type NPT acc. to ANSI B1.20.1

Size	For Sealtite Nominal Size inch	Max. Internal Ø mm	Thread Length TL mm	Thread Ø TD mm	Spanner Width SW Cap mm	Spanner Width SW Body mm	Outer Ø D mm	max. Height H mm	Part Number	Packing Unit
Npt 1/2	3/8"	10,2	13,0	21,3	26,0	24,0	29,0	23,5	BBFN-02(S) F	50
	1/2"	13,5			29,0	27,0	32,7	24,0	BBFN-02 F	
Npt 3/4	3/4"	18,5	15,0	26,7	35,0	33,0	38,7	24,5	BBFN-03 F	25
Npt 1	1"	23,5	15,0	33,4	45,0	43,0	50,0	31,5	BBFN-04 F	10
Npt 1 1/4	1 1/4"	31,8	16,0	42,2	54,0	52,0	60,0	37,0	BBFN-05 F	5
Npt 1 1/2	1 1/2"	36,8	18,0	48,3	63,0	60,0	69,3	38,5	BBFN-06 F	5
Npt 2	2"	47,8	20,0	60,3	77,0	74,0	85,0	45,5	BBFN-07 F	4