

Lock Nuts, without Flange Polyamide




Lock nuts, without flange

- For standard industrial applications.
- Safe fastening of cable glands.

Technical Details

Material	PA 6 GF 30 (Polyamide 6, 30% Glass Fiber Reinforced)	
Flammability	HB according to UL94	
Operating Temperature	Permanent	Intermittent
	-20 °C to +100 °C	-30 °C to +150 °C
Thread Type	<ul style="list-style-type: none"> • Metric EN 60423 • PG DIN 40430 	

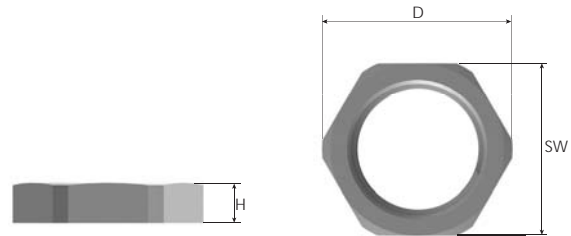

Thread Type METRIC acc. to EN 60423

Size	Spanner Width SW mm	Outer Diameter D mm	max. Height H mm	Part Number			Packing Unit
				RAL 7035 light grey	RAL 7001 grey	RAL 9005 black	
M12x1,5	18	19,5	5,0	BLMN-1S	BLMN-0S	BLMN-2S	100
M16x1,5	22	24,2	5,0	BLMN-11	BLMN-01	BLMN-21	50
M20x1,5	26	28,6	6,0	BLMN-12	BLMN-02	BLMN-22	50
M25x1,5	32	35,0	6,0	BLMN-13	BLMN-03	BLMN-23	50
M32x1,5	41	46,1	7,0	BLMN-14	BLMN-04	BLMN-24	25
M40x1,5	50	55,3	7,0	BLMN-15	BLMN-05	BLMN-25	10
M50x1,5	60	66,1	8,0	BLMN-16	BLMN-06	BLMN-26	10
M63x1,5	75	82,5	8,0	BLMN-17	BLMN-07	BLMN-27	10

Thread Type PG acc. to DIN 40430

Size	Spanner Width SW mm	Outer Diameter D mm	max. Height H mm	Part Number			Packing Unit
				RAL 7035 light grey	RAL 7001 grey	RAL 9005 black	
PG 7	19	21,0	5,0	BLN-11	BLN-01	BLN-21	100
PG 9	22	24,0	5,0	BLN-12	BLN-02	BLN-22	100
PG 11	24	26,0	5,0	BLN-13	BLN-03	BLN-23	50
PG 13,5	27	29,0	6,0	BLN-14	BLN-04	BLN-24	50
PG 16	30	33,0	6,0	BLN-15	BLN-05	BLN-25	50
PG 21	36	39,0	7,0	BLN-16	BLN-06	BLN-26	25
PG 29	46	50,0	7,0	BLN-17	BLN-07	BLN-27	25
PG 36	60	66,0	8,0	BLN-18	BLN-08	BLN-28	25
PG 42	65	72,0	8,0	BLN-19	BLN-09	BLN-29	10
PG 48	70	78,0	8,0	BLN-20	BLN-10	BLN-30	10