

Dome Plugs Polyamide

Industrial Application




Plugs for sealing cable insert

- For standard industrial applications.
- Sealing of cable glands when no cable is used.

Technical Details

Material	PA 6 (Polyamide 6)	
Flammability	V2 acc. to UL94	
Operating Temperature	Permanent	Intermittend
	-20 °C to +100 °C	-30 °C to +150 °C

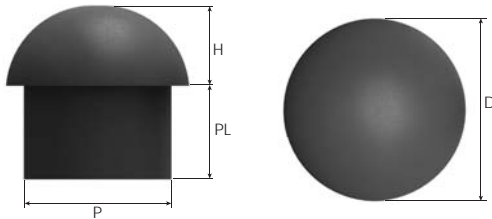

Dome plugs

Size	Plug Ø P mm	Dome Ø D mm	Plug Length PL mm	max. Height H mm	Dome Plug fits into Clamping Range Ø min-max				RAL 7035 light grey	Part Number RAL 7001 grey	RAL 9005 black	Packing Unit
					Standard Seal mm	Reducing Seal mm	Double Seal mm	Outer Seal mm				
9	4,0	9,2	12,0	4,0	3,0 - 6,5	2,0 - 5,0	2,0 - 4,0	3,0 - 6,5	BDP-09-11	BDP-09-01	BDP-09-21	100
	6,4											
11	5,0	10,5	14,0	5,0	4,0 - 8,0	2,0 - 6,0	3,0 - 5,0	4,0 - 8,0	BDP-11-11	BDP-11-01	BDP-11-21	50
	8,0		13,7	4,7								
13	7,0	13,3	15,0	5,7	5,0 - 10,0	3,0 - 7,0	3,0 - 7,0	5,0 - 10,0	BDP-13-11	BDP-13-01	BDP-13-21	50
	9,7		9,0	5,3								
			15,0	5,7								
16	7,0	15,8	14,0	7,5	6,0 - 12,0	5,0 - 9,0	4,0 - 7,0	6,0 - 12,0	BDP-16-10	BDP-16-00	BDP-16-20	50
	8,5		13,0	7,7								
	12,0		14,0	7,5								
	13,0		7,0 - 13,0	7,0 - 11,0								
18	11,0	18,0	13,5	8,5	10,0 - 14,0	7,0 - 12,0	7,0 - 11,0	10,0 - 14,0	BDP-18-11	BDP-18-01	BDP-18-21	50
	13,6											
20	13,0	20,0	14,5	7,0	11,0 - 17,0	9,0 - 13,0	8,0 - 13,0	11,0 - 17,0	BDP-20-11	BDP-20-01	BDP-20-21	50
	16,4											
22	14,0	22,0	14,0	9,5	13,0 - 18,0	11,0 - 15,0	9,0 - 14,0	13,0 - 18,0	BDP-22-11	BDP-22-01	BDP-22-21	25
	17,8											
24	16,1	24,0	15,5	9,0	15,0 - 21,0	9,0 - 16,0	11,0 - 16,0	15,0 - 21,0	BDP-24-11	BDP-24-01	BDP-24-21	25
	20,4											
29	20,3	28,5	15,0	9,7	18,0 - 25,0	12,0 - 20,0	13,0 - 20,0	18,0 - 25,0	BDP-29-11	BDP-29-01	BDP-29-21	25
	25,0											
32	21,1	31,5	15,8	9,2	19,0 - 28,0	16,0 - 23,0	16,0 - 21,0	19,0 - 28,0	BDP-32-11	BDP-32-01	BDP-32-21	10
	27,5											
37	26,3	36,8	17,0	10,7	22,0 - 32,0	20,0 - 26,0	20,0 - 26,0	22,0 - 32,0	BDP-37-11	BDP-37-01	BDP-37-21	10
	31,8											
45	31,2	43,3	20,2	11,9	30,0 - 38,0	25,0 - 31,0	21,0 - 31,0	30,0 - 38,0	BDP-45-11	BDP-45-01	BDP-45-21	10
	38,0											
52	35,2	51,0	22,5	16,0	34,0 - 44,0	29,0 - 35,0	27,0 - 35,0	34,0 - 44,0	BDP-52-11	BDP-52-01	BDP-52-21	10
	44,2											