


## EMC 2 Cable Glands Brass

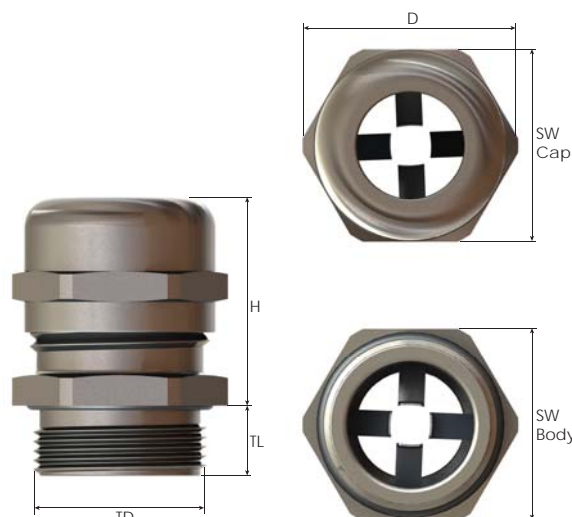

### Thread Type NPT acc. to ANSI B1.20.1

Size	Clamping Range Ø min-max		Shield Diameter Ø min-max		Thread Length TL		Thread Ø TD		Spanner Width				Outer Ø D		max. Height H		Part Number	Packing Unit
	mm	inch	mm	inch	mm	inch	mm	inch	SW Cap mm	inch	SW Body mm	inch	mm	inch	mm	inch		
NPT 3/8"	5,0 - 10,0	0.197 - 0.394	4,0	0.157	11,5	0.453	17,14	0.675	20	0.787	20	0.787	22,0	0.866	29,5	1.161	BNEM-01	50
NPT 1/2"	6,0 - 12,0	0.236 - 0.472	5,0	0.197	13,0	0.512	21,34	0.840	22	0.866	22	0.866	24,5	0.965	25,5	1.004	BNEM-02	50
NPT 3/4"	13,0 - 18,0	0.512 - 0.709	11,0	0.433	13,0	0.512	26,67	1.050	30	1.181	30	1.181	33,0	1.299	35,5	1.398	BNEM-03	25
NPT 1"	18,0 - 25,0	0.709 - 0.984	16,0	0.630	13,0	0.512	33,40	1.315	40	1.575	43	1.693	48,5	1.909	43,0	1.693	BNEM-04	10

### Thread Type PG acc. to DIN 40430

Size	Clamping Range Ø min-max		Shield Diameter Ø min-max mm	Thread Length TL		Thread Ø TD mm	Spanner SW Cap mm	Width SW Body mm	Outer Ø D mm	max. Height H mm	Part Number	Packing Unit
	mm	mm		mm	mm							
PG 7	3,0 - 6,5	2,5	6,0	12,5	14	14	15,5	22,0	BSEM-01 BSEM-01	50		
			8,0									
PG 9	4,0 - 8,0	3,0	6,0	15,2	17	17	18,9	23,2	BSEM-02 BSEM-02	50		
			10,0									
PG 11	5,0 - 10,0	4,0	6,0	18,6	20	20	22,0	26,0	BSEM-03 BSEM-03	50		
			10,0									
PG 13,5	6,0 - 12,0	5,0	6,5	20,4	22	22	24,5	24,5	BSEM-04 BSEM-04	50		
			10,0									
PG 16	10,0 - 14,0	8,5	6,5	22,5	24	24	26,5	28,0	BSEM-05 BSEM-05	25		
			10,0									
PG 21	13,0 - 18,0	11,0	7,2	28,3	30	30	33,0	32,5	BSEM-06 BSEM-06	25		
			12,0									
PG 29	18,0 - 25,0	16,0	8,0	37,0	40	40	44,5	38,0	BSEM-07 BSEM-07	20		
			12,0									
PG 36	22,0 - 32,0	20,0	9,0	47,0	50	50	55,5	48,0	BSEM-08 BSEM-08	15		
			14,0									
PG 42	30,0 - 38,0	28,0	12,0	54,0	58	58	64,0	48,0	BSEM-09 BSEM-09	12		
			16,0									
PG 48	34,0 - 44,0	31,0	14,0	59,3	64	64	70,0	52,4	BSEM-10 BSEM-10	12		
			18,0									